


# Ferrite-backed Embedded NFC Antenna

Pulse Part Number CW3580

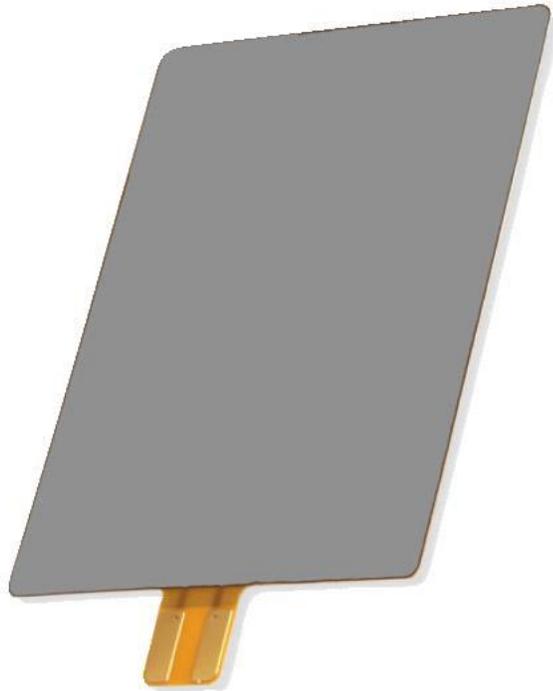

The CW3580 is a flexible Near Field Communication (NFC) antenna ideal for tight-space embedded products such as tablets, laptops, and payment terminal devices. It is intended for secure payment applications where connect distances are highly constricted to keep sensitive information safe.

The CW3580 has a semi-flexible sintered ferrite backing designed to optimize magnetic fields, thus increasing the corresponding field strength of the antenna. Mounting the antenna is easily accomplished using the thin but aggressive holding adhesive backing. Recommended for mounting on the inside of battery covers, or locations where the antenna will be on or in close proximity to ground planes or displays.

## Features

- Excellent performances on metal surfaces
- Thin, semi-flexible structure
- Easily assembles to device covers or mechanics
- Excellent for tap-n-pay applications
- Well-known antenna concept, reliable technology
- RoHS Compliant Product

## Applications

- Mobile devices
- Payment terminals
- Sharing / pairing

## Electrical Specifications

Frequency [MHz]	13.56
Reading Distance [mm]	20 EMVCo 15 Card (avg)
Impedance [ $\Omega$ ]	50 / 80
Self Resonance Frequency [MHz]	58
Inductance [ $\mu$ H]	0.95
Resistance [ $\Omega$ ]	3.9
Q-Factor	20
Matched Q Value	5-15

## Environmental Specifications

Operating Temperature [ $^{\circ}$ C]	-40 to +85
---------------------------------------	------------

## Mechanical Specifications

Color	Grey
Dimensions [in/mm]	1.38 x 1.97 x 0.018 (35 x 50 x 0.45)


**NOTE:** Electrical characteristics depend on distance from metal objects and the location of the antenna on the device. Measured in free space

- (1)With matching network
- (2)Bare coil without any matching network
- (3)With matching network (adjustable).

Contact: [mobiledeviceantenna.sales@pulseelectronics.com](mailto:mobiledeviceantenna.sales@pulseelectronics.com)

# Ferrite-backed Embedded NFC Antenna

Pulse Part Number CW3580

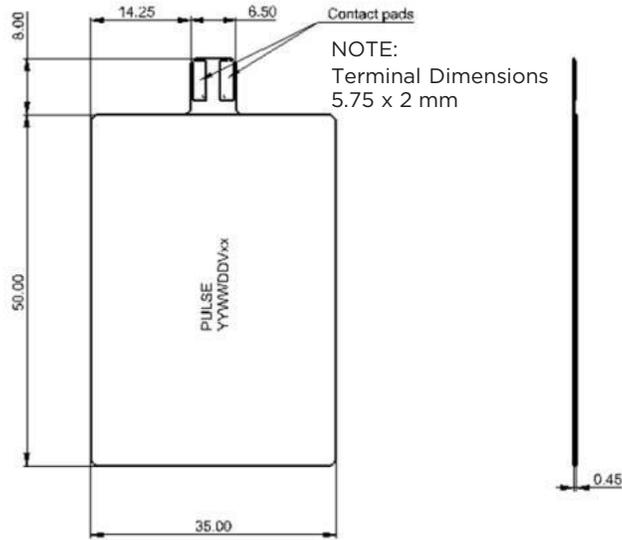

## Recommended matching network

Component	Value	Note
L <sub>emc</sub>	560 nH	Filter resonance at 15.4 MHz
C <sub>emc</sub>	180 pF	Filter resonance at 15.4 MHz
C1	51 pF	Antenna matching component, value depends on the antenna environment Antenna matching
C2	198 pF	Antenna matching component, value depends on the antenna environment Antenna matching
R <sub>q</sub>	0 Ohm	R <sub>q</sub> resistors used to lower Q-value

