

UMTS RX Ceramic antenna

Pulse Part Number CW3037



Features

- Omni directional radiation (xy-plane)
- Low profile
- Compact size W x L x H (3.2 x 1.6 x 1.1 mm)
- Low weight (33 mg)
- Lead free materials
- Fully SMD compatible
- Lead free soldering compatible
- Tape and reel packing
- RoHS Compliant Product

Applications

- 2.1 GHz UMTS Rx
- 2.1 GHz Diversity Rx
- 2.1 GHz W-CDMA Rx
- 2.1 GHz AWS Rx

Electrical specifications @ +25 ° C

Note: Electrical characteristics depend on test board (GP) size and antenna positioning on GP and Ground Clearance area size.


Typical performance (testboard size 80x37 mm, PWB ground clearance area 4.0 x 4.25 mm)

Frequency Range [MHz]	Linear Max Gain [dBi]	Return loss min. [dB]	Efficiency [%]/[dB]	Impedance [Ω]	Operating Temperature [$^{\circ}$ C]
2110 – 2170	1.5 (peak) 0.5 (band edges)	-6	75 / -1.3(peak) 60 / -2.25(band edges)	50	-40 to +85

UMTS RX Ceramic antenna

Pulse Part Number CW3037

Terminal Configuration and antenna dimensions

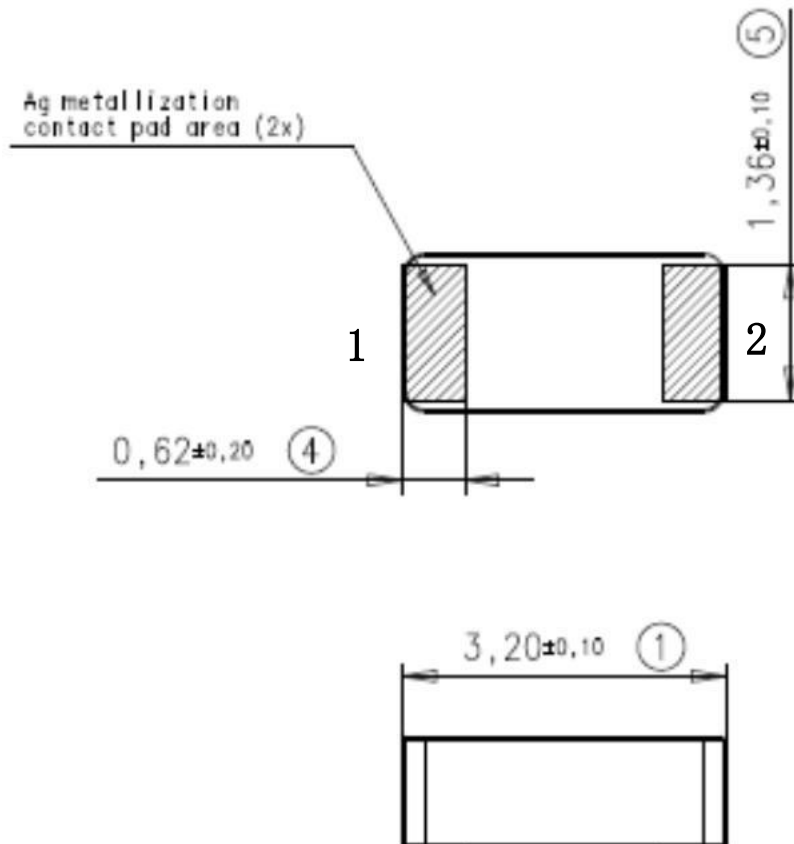

No.	Terminal Name	Terminal Dimensions
1	Feed / GND	0.62 x 1.36 mm
2	Feed / GND	0.62 x 1.36 mm

Antenna is symmetrical. Either of terminals 1 or 2 can be Feed / GND

UMTS RX Ceramic antenna

Pulse Part Number CW3037


Antenna PWB Layout

Ground cleared under antenna, clearance area 4.00 x 4.25 mm, Matching and tuning component value and placement depend on application and surrounding mechanics / materials.

Feed line should be designed to match 50 Ω characteristic impedance, depending on PWB material and thickness. Recommended test board layout for electrical characteristic measurement, test board outline size 80 x 37 mm.


Note: 1) Note: with miniature ground clearance area the antenna performance is applicable for AWS-RX and Diversity RX solutions.

2) All dimensions are in metric system.

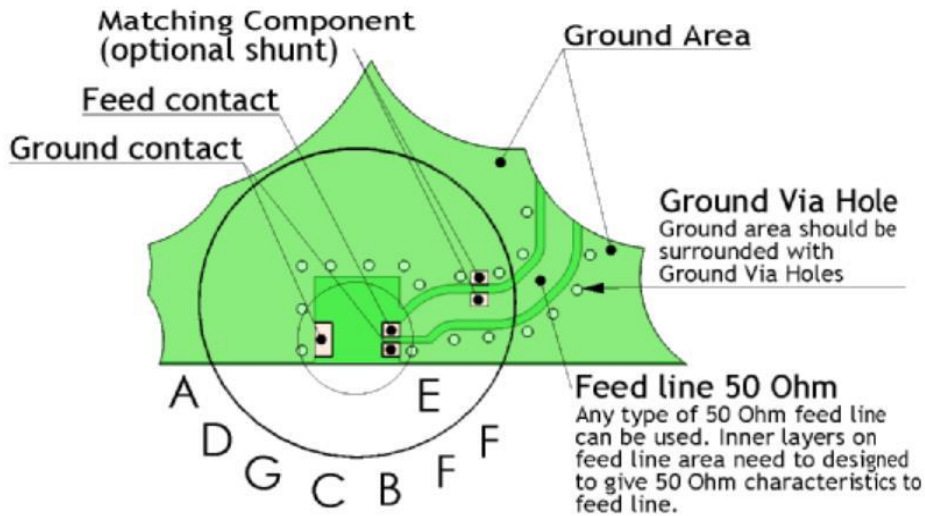


Ground clearance area


Ground clearance area (4,00 x 4,25 mm)

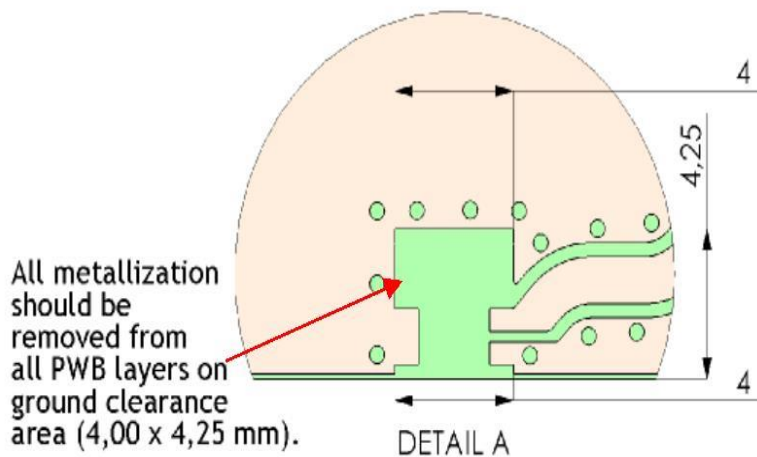

Opening in bottom/inner ground layers

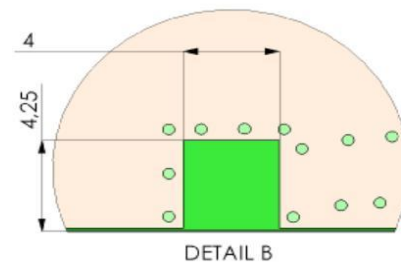


Opening in other layers (no ground/ RF)

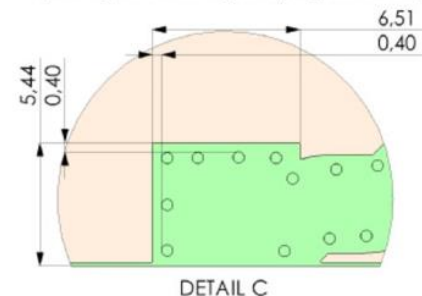


UMTS RX Ceramic antenna

Pulse Part Number CW3037

PWB pad dimensions and antenna position

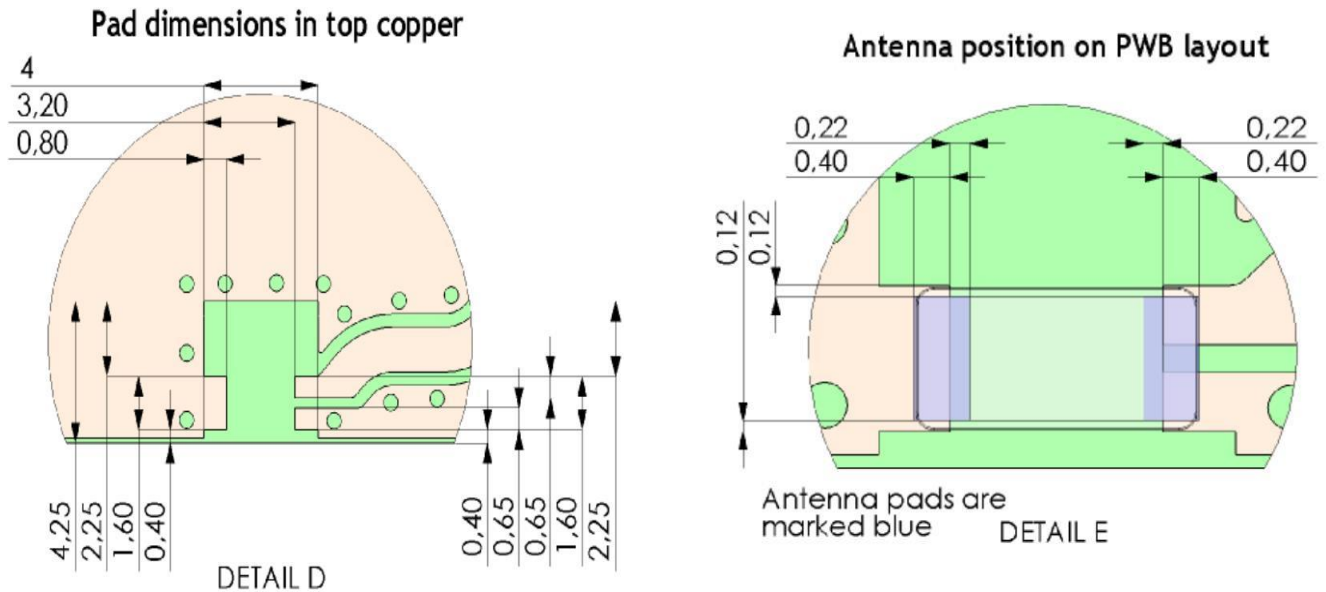


Typical Ground via hole placement in PWB layout

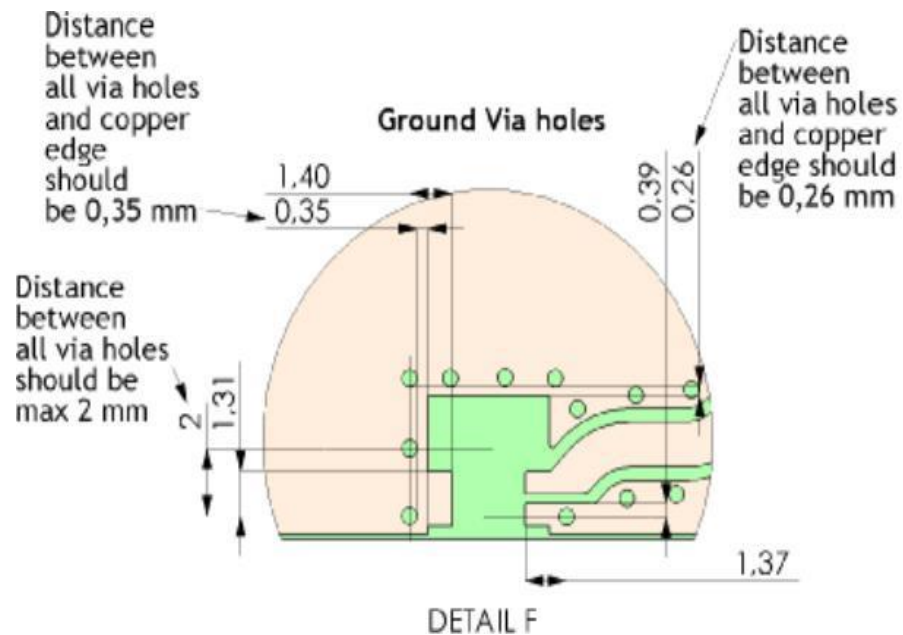

UMTS RX Ceramic antenna


Pulse Part Number CW3037

Solder resist opening and paste stencil recommendations

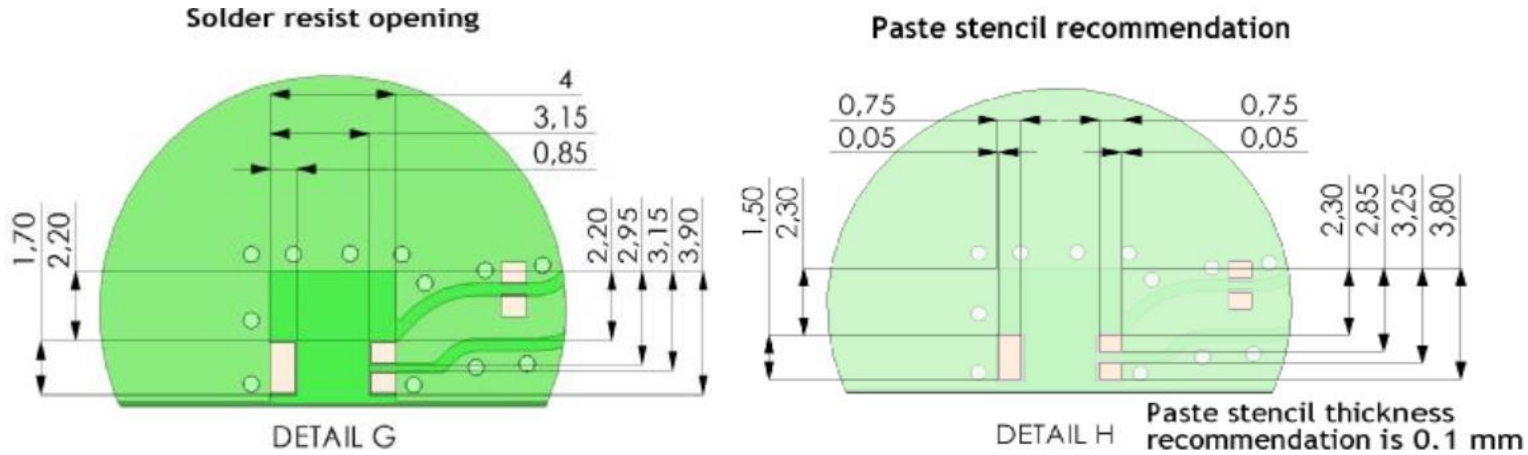

Recommended antenna position on PWB

Our test PWB size is 37 x 80 mm, other sized boards can be used depending on customer device size (minimum 35 x 35 mm)

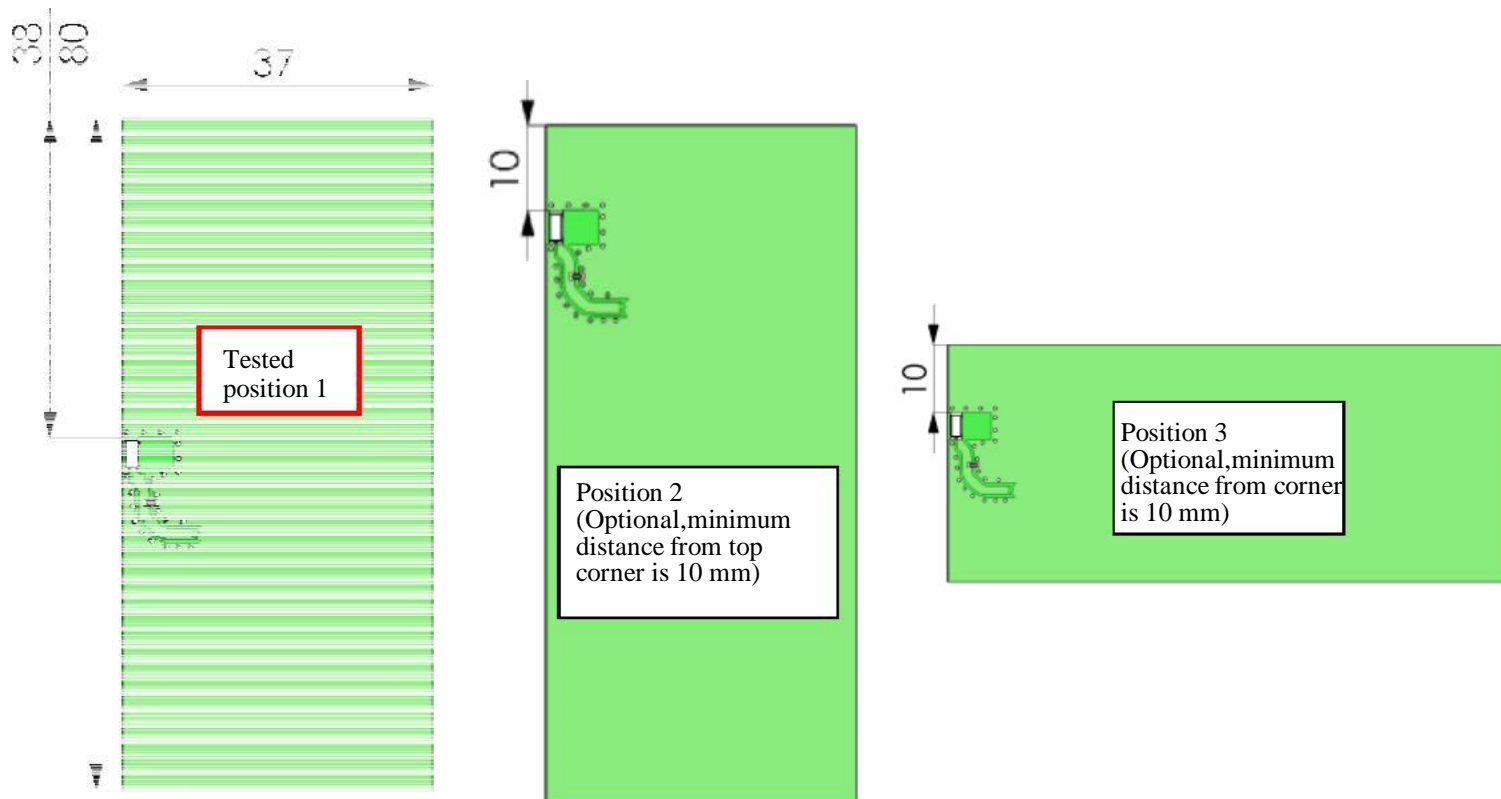

Contact: mobiledeviceantenna.sales@pulseelectronics.com



UMTS RX Ceramic antenna

Pulse Part Number CW3037



Typical Electrical Characteristics (T=25 °C)

Measured on the 80 x 37mm test board without matching circuit

Typical Return Loss S11/ impedance

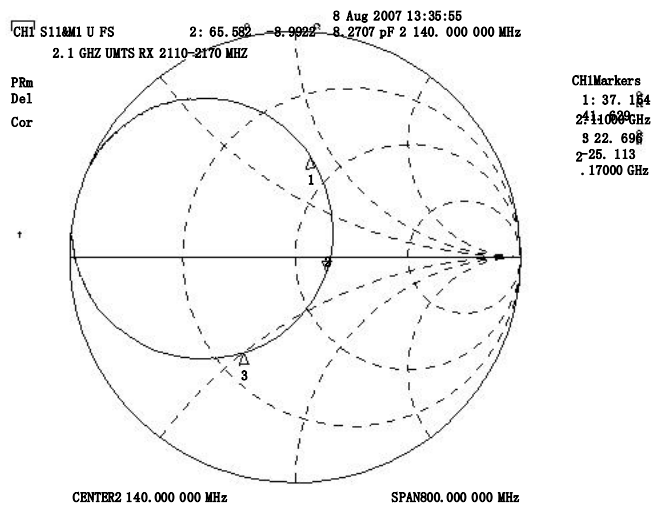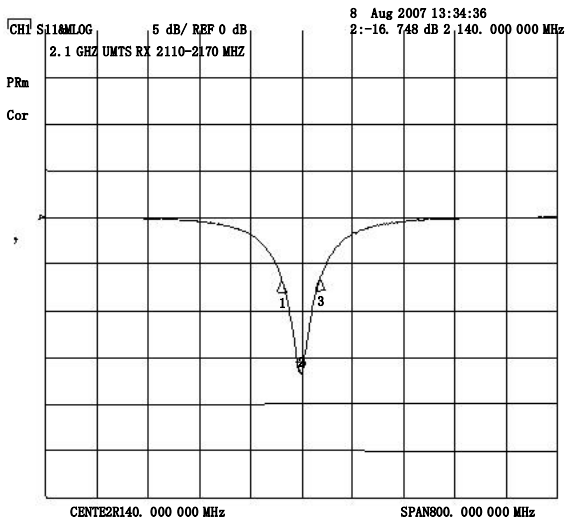

Typical free space efficiency and maximum gain

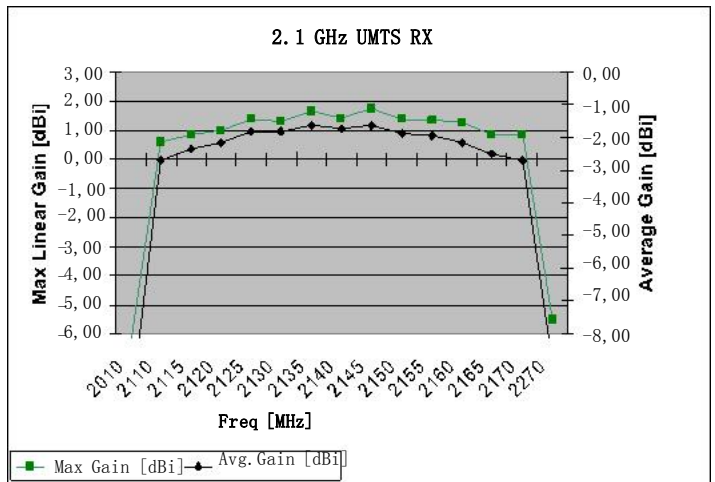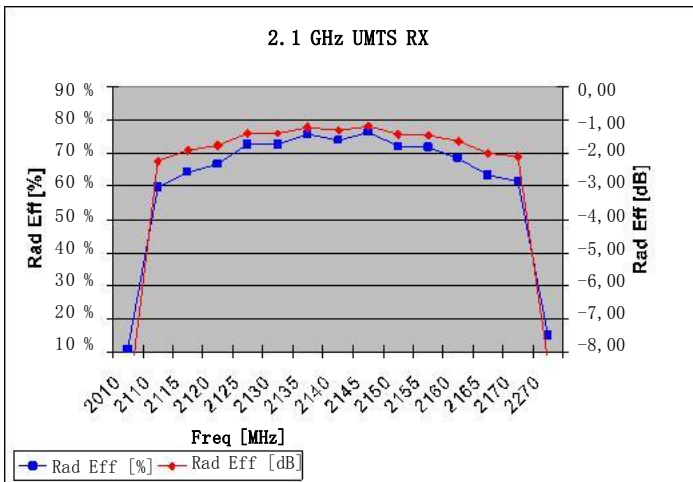

Contact: mobiledeviceantenna.sales@pulseelectronics.com




UMTS RX Ceramic antenna


Pulse Part Number CW3037

Typical Free Space Radiation Patterns

XZ-PLAN

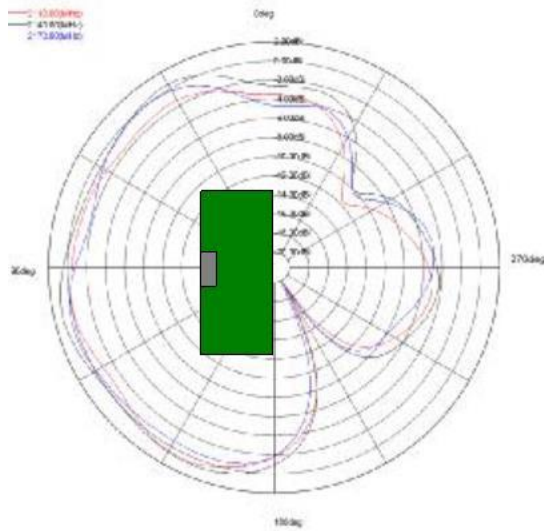

ZY-PLANE

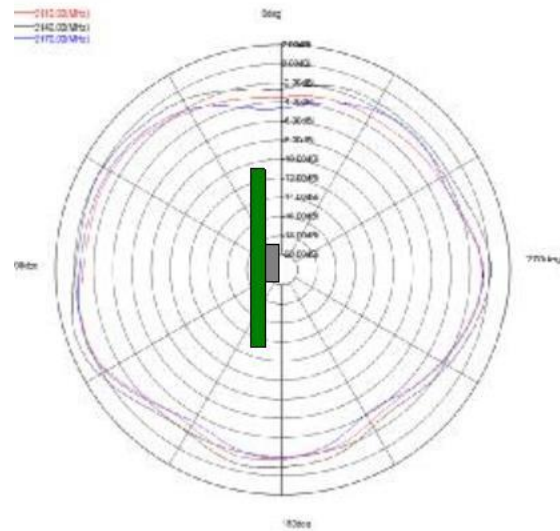

XY-PLANE

